



RAYBRIGHT

# 360 Degree Pendant Light

**Applications:** For Machinery Spaces



## FEATURES:

### Material

Body - Aluminum Pressure Die Cast  
Diffuser and Protective Guard -  
Injection Moulded Polycarbonate.

### Protection

IP-56

### Life of Light Fitting

≥50,000 Hrs

• LED driver has inbuilt protection from heating, short circuit, surge.

### Finish:

Epoxy-polyurethane  
Painted RAL 9010/ Custom  
finish as per request

### Weight:

≤3 Kg (± 10%)

## ELECTRICAL:

### Voltage

110-230V AC, 50 Hz, 1 Ph.

### LUX value at 1M

≥250 lux

### EMI/EMC

Comply to MIL-STD-461F

### Wattage

≤20W



### Environmental Test

Comply to JSS55555


## Key Features

- 360° illumination like a light bulb.
- Specially designed for submarine environment.
- Injection moulded diffuser with injection moulded diffuser guard.
- THD < 10%.
- Dimmable versions available.
- Surge Immunity: IEC 61000-4-5, Level 4.

## Technical Drawings

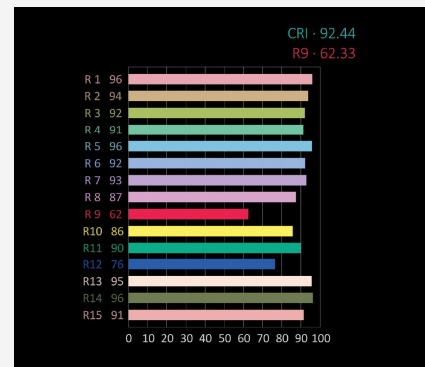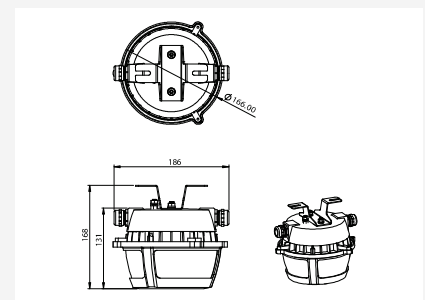

CRI

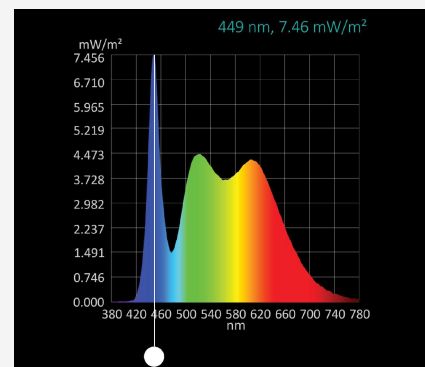

Spectrum

All specifications are for reference only.  
Actual product may vary depending upon  
the technology upgrataion.