



RAYBRIGHT

LED Based Bunk Light


Applications: For Bunk Areas



Key Features

- Specially designed for bunks for reading.
- Very low glare.
- USB sockets provided for charging of devices.
- THD < 10%
- Surge Immunity IEC 61000-4-5 Level 4.

Technical Drawings

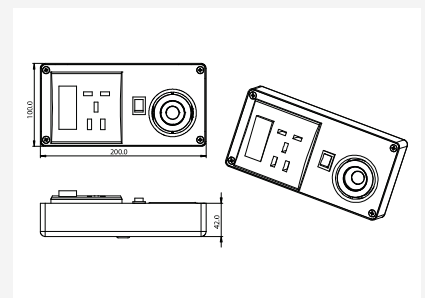

FEATURES:

Material

Body - Mild Steel
Diffuser - Cover-Stainless Steel

Finish:

Epoxy-polyurethane
Painted RAL 9010/ Custom
finish on request

Protection

IP-20

Weight:

1.2 Kg (± 10%)

Life of Light Fitting

≥50,000 Hrs

- LED driver has inbuilt protection from heating, short circuit, surge.

ELECTRICAL:

Voltage


110-230V AC, 50 Hz, 1 Ph.

Wattage


≤5W

LUX value at 1M

≥400 lux

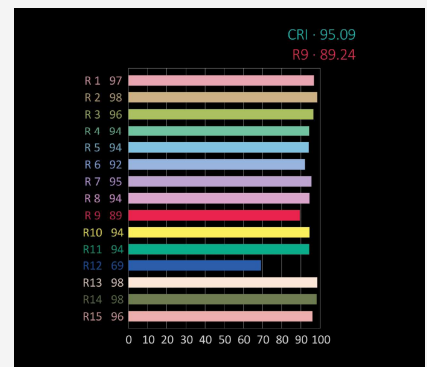

CRI

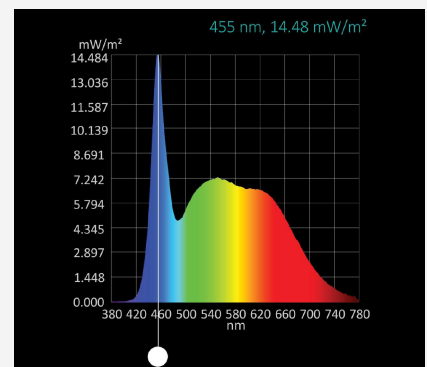

Spectrum

All specifications are for reference only.
Actual product may vary depending upon
the technology upgrataion.