




RAYBRIGHT

LED PENDENT LIGHT

Applications: For gangway, passage, Engine room illumination

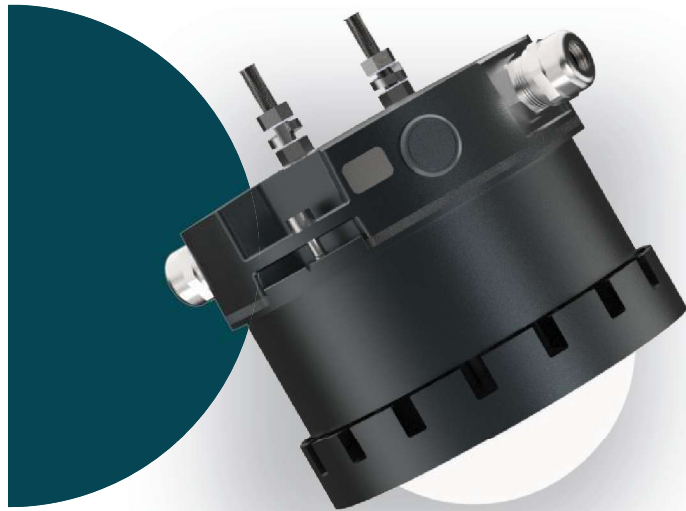

FEATURES:

Material

Body - Aluminium Die Casted
Diffuser - Injection Moulded Polycarbonate

Protection

IP-56

Life of Light Fitting

≥50,000 Hrs

• LED driver has inbuilt protection from heating, short circuit.

Finish:

Painted to RAL 9010
Custom finish on request

Weight:

2 Kg (± 10%)

ELECTRICAL:

Voltage

110-230V AC, 50 Hz, 1 Ph.

LUX value at 1M

≥300 lux

EMI/EMC

Comply to MIL-STD-461E

Wattage

≤15W



Environmental Test

Comply to JSS55555


Key Features

- Designed to withstand Harsh Environments and Ambient Temp. up to 65 Degrees.
- MTBF >40,000 Hrs.
- Encapsulated LED Drivers for Enhanced Lifetime.
- Field-Programmable LED Drivers.
- Flicker-Free Versions also Available.
- THD <10%.
- Surge Immunity: IEC 61000-4-5, Level 4.

Technical Drawings

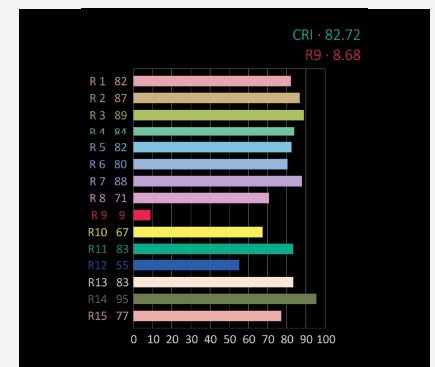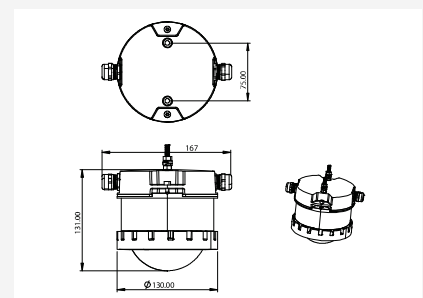

CRI

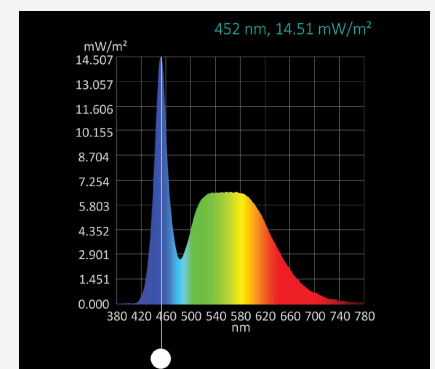

Spectrum

All specifications are for reference only. Actual product may vary depending upon the technology upgrataion.